
AB LARS LUNDAHL

Tibeliusgatan 7 S-761 50 NORRTÄLJE SWEDEN Phone: Int. +46-176 139 30 Nat. 0176-139 30 Int. +46-176 139 35 Nat. 0176-139 35

Fax:

Mains Isolation Transformer LL1655

LL1650 is a C-core mains transformers for isolation and DC current elimination. The core is assembled with a carefully selected, very small air-gap to compensate for any mains DC-unbalance. Estimated power rating 300 VA which can be increased with good cooling.

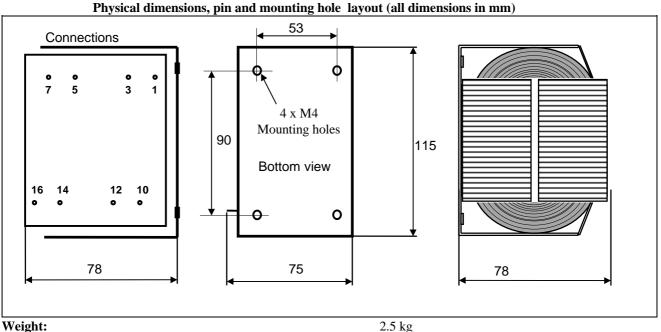

Copper resistance, windings 1 - 3 and 7 - 5 respectively Copper resistance, windings 10 - 12 and 14 - 16 respectively Isolation between windings / between windings and core

2.5 Kg
3.3 Ω
2.9 Ω
4 kV / 4 kV

Winding schematics: $1 \quad 3 \quad + \quad 7 \quad 5$ $+ \quad \cup \quad Coil 1 \quad Coil 2 \quad + \quad \cup \quad 1 \quad 1$ $+ \quad 1 \quad 1 \quad 1 \quad 1$

